




POWER ARM
VERSI SERIES

PA3430 VERSI - 3.4m (11' 2") reach
PA4030 VERSI - 4.0m (13' 1") reach

VERSI SERIES		
Controles avanzados	PA3430 VERSI	PA4030 VERSI
Cable Control	—	—
Motion Mini	—	—
Motion	■	■
Evolution	—	—
Revolution Including Easy Drive System (EDS)	—	—
Two-way Rotor Engagement - Cable Control (CRC)	—	—
Two-way Rotor Engagement - Electric Control (ERC)*	■	■
Montaje		
Front 3-Point Mounting Including Stabiliser	■	■
Front DIN Plate Mounting	□	□
Rear 3-Point Mounting Including Stabiliser	—	—
Rear 3-Point to 4-Point Hitch Stabiliser Kit	—	—
Rear 3-Point to 5-Point Axle Mounting Kit**	—	—
Rear 5-Point Rigid Frame, Axle Mounting Kit**	—	—
Configuración brazo		
Straight Armset	■	■
Midcut Armset	—	—
Telescopic Armset	—	—
Variable Forward Reach Armset (VFR)	—	—
Telescopic-Variable Forward Reach Armset (T-VFR)	—	—
Parallel Arm Geometry	—	—
Sistema hidráulico		
Horsepower	30hp	30hp
System Type	—	—
Pump Type	—	—
Total Flow Rate l/min	55.0	55.0
Arm Circuit Flow Rate l/min	9.0	9.0
Attachment Circuit Flow Rate l/min	46.0	46.0
Oil Tank Capacity	—	—
Oil Cooler	—	—
Totally Independent Hydraulic System	—	—
Mejoras hidráulicas		
Angle Float Kit	□	□
Lift Float Kit	□	□
Advanced Float Kit (only on EVOLUTION controls)	—	—
EDS (only on REVOLUTION controls)	—	—
PowerBoost (75 l/min Arm Circuit Flow Rate)	—	—
Additional Hydraulic Services	□	□
Equipo de seguridad		
External Debris Blower	—	—
Integrated Debris Blower	—	—
Road Lighting Kit	—	—
Warning Arrow Kit	—	—
Window Guards	■	■
Cab Protection Kit	—	—
Safety Breakaway	■	■
Power Slew	■	■
Cushioned Top Link	—	—
Requerimientos tractor		
Minimum Tractor Weight	1,750kg	2,000kg
Minimum Tractor Horsepower	35hp	55hp
Especificaciones		
Machine Weight #	550kg	575kg
Left and Right-Hand Build Options	■	■

* Including SoftStart ** Excluding axle brackets & latches # Depending on specification, excluding attachment & oil

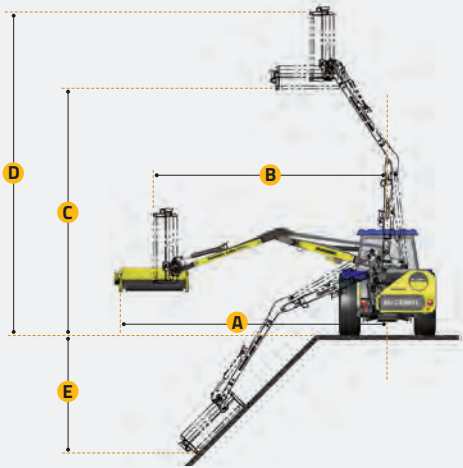

ALCANCE DEL BRAZO

	PA3430 VERSI	PA4030 VERSI
A	3.4m	4.0m
B	3.1m	3.9m
C	3.0m	3.6m
D	3.9m	4.5m
E	1.1m	1.7m

CABEZALES DESBROZADORES

	PA3430 VERSI	PA4030 VERSI
1.00m Supercut Flailhead - DD	□	□
1.20m Supercut Flailhead - DD	□	□
1.20m Multicut Flailhead - DD	—	—
1.20m Multicut Flailhead - BD	—	—
1.20m Tuffcut Flailhead - DD	—	—
1.20m Twincut Flailhead - DD	—	—
1.20m Omega Flailhead - DD	—	—
1.20m Omega Flailhead - BD	—	—
1.50m Multicut Flailhead - DD	—	—
1.50m Multicut Flailhead - BD	—	—
1.50m Twincut Flailhead - DD	—	—
1.50m Omega Flailhead - DD	—	—
1.50m Omega Flailhead - BD	—	—
1.60m Multicut Flailhead - DD	—	—
1.60m Multicut Flailhead - BD	—	—
1.60m Tuffcut Flailhead - DD	—	—
1.60m Omega Flailhead - DD	—	—
1.60m Omega Flailhead - BD	—	—
2.00m Multicut Flailhead - DD	—	—
2.00m Multicut Flailhead - BD	—	—
Flailhead options		
Flailhead Skid Kit	□	□
Cushioned Grass Mowing Roller	—	—
Hydraulic Roller	—	—
Hydraulic Front Hood	—	—

■ Equipamiento estándar □ Equipamiento opcional — No disponible

Diseñados para contratistas especializados que trabajan en los sectores del paisajismo y los servicios, los modelos PA3430 VERSI y PA4030 VERSI incorporan un innovador sistema hidráulico de desplazamiento lateral que permite al operador alternar entre el corte a la izquierda y a la derecha con sólo pulsar un botón. El montaje delantero y trasero y el cabezal de mayal giratorio garantizan que estos Power Arms compactos y maniobrables ofrezcan a los operadores la flexibilidad de corte necesaria para prosperar en una amplia variedad de entornos de trabajo diferentes.

- 2 Opciones de alcance de 3,4 m a 4,0 m
- 2 Opciones de control avanzado
- 2 Opciones de montaje
- Innovador conjunto de brazos
- 3 Opciones de flotación
- 10 Implementos

